


Waveguide to Coaxial Adapter (End-Launch) SRFS84WECASKPC

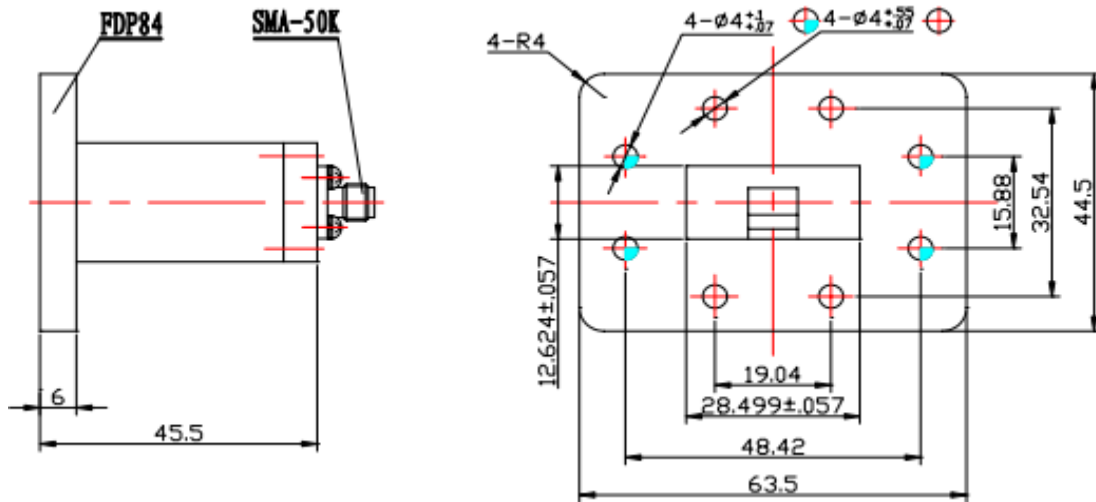

Mechanical Specifications	
Waveguide type	WR112
Material	Alloyed Copper
Flange type	FDP84/CPR112F (COVER)
Connector Type	SMA-Female
Inside finish	Silver plating
Outside finish	Anticorrosion grey paint
Temperature range	-40°C ~ +70°C
Electrical Specifications	
Frequency Range	6.57-9.99 GHz
VSWR (Max)	1.25:1