


Wideband Wire LPDA Antenna Model no.: SRFS- LPDA-A0097

Product Description

The LPDA-A0097 is medium-gain wideband directional LPDA antenna and covers the frequency band from 30 MHz to 500 MHz. This antenna is constructed using a unique wire technology. This makes the antenna lightweight and allows for very compact storage, quick, easy deployment and mounting. The flexible nature of this antenna makes it is very easy to collapse the antenna and break off any accumulated ice. All antenna elements are permanently attached to the boom, to prevent any parts from becoming lost in the field.

PRODUCT FEATURES:

- Quick deployment
- Lightweight
- Quick deployable
- Compact storage
- Wideband
- Low and stable VSWR
- Vertical or horizontal polarization

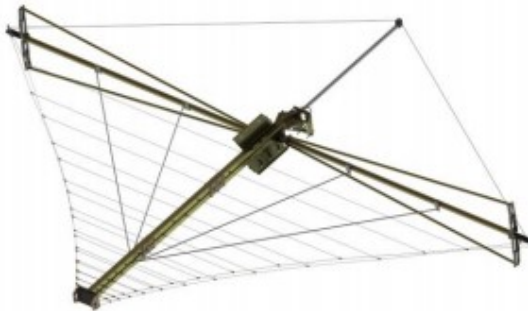


Electrical Specifications	
Frequency range	30 – 500 MHz
VSWR	< 2.5:1
Nominal input impedance	50 Ω
Connector	N-type female
Feed power handling	200 W
Gain	See gain graph
Polarization	Linear, vertical or horizontal
Mechanical Specifications	
Dimensions	Length: 1875 mm (excluding tension system) Height: 3550 mm Width: 420 mm
Packed dimensions (l x h x w)	1910 mm x 200 mm x 210 mm
Mounting method	Bracket attached with U-bolts to mast
Environmental Specifications	
Wind survival	150 km/h when guyed
Temperature (operational)	-35 °C to 71 °C
Temperature (storage)	-35 °C to 71 °C
Exposed materials	Aluminium, stainless steel and tufnol

SRFS TELEINFRA




Wideband Wire LPDA Antenna Model no.: SRFS- LPDA-A0097


Measured VSWR:

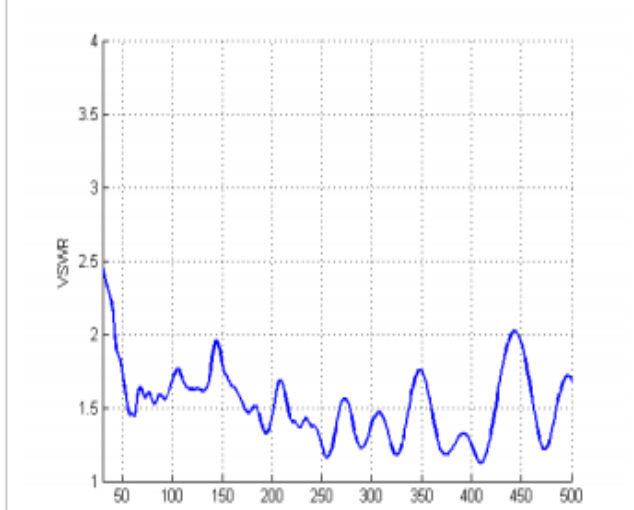

Measured gain:

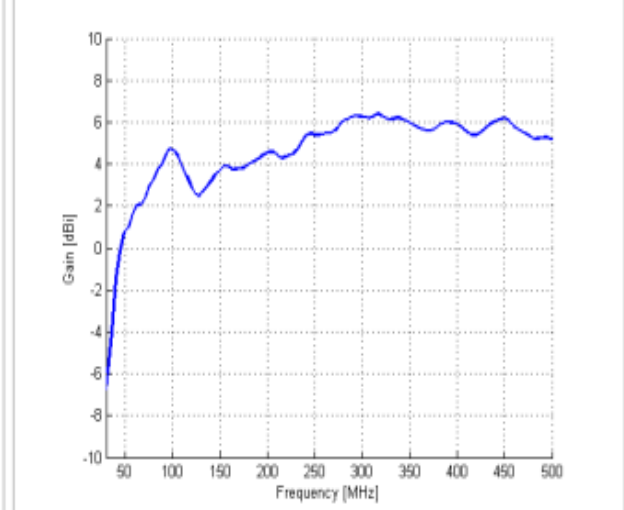

Radiation patterns:

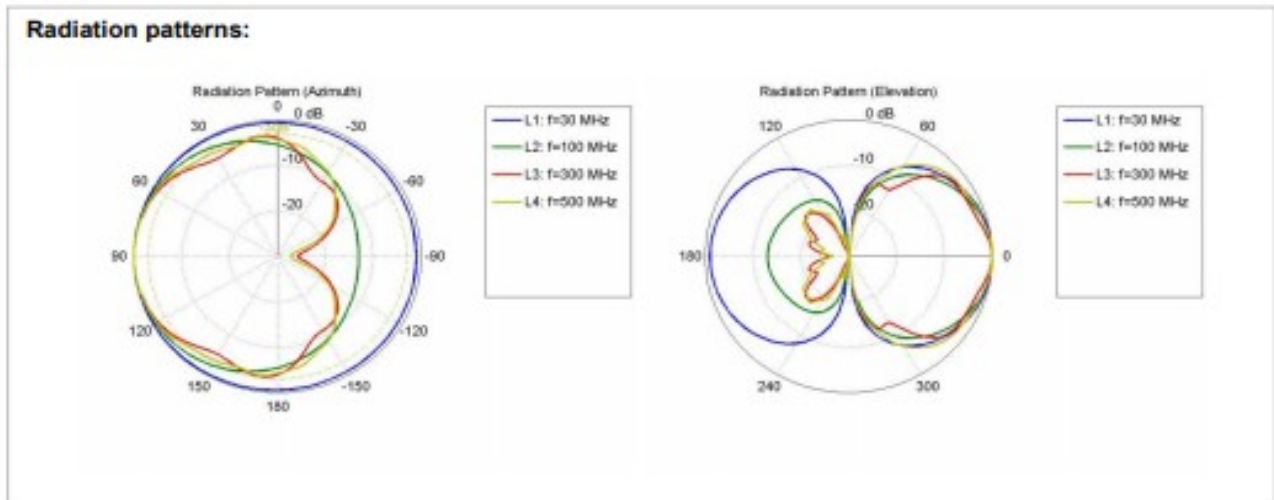

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in

