


BNC/Male 50 Ohm to BNC/Female 75 Ohm Impedance Matching Pad 2 GHZ

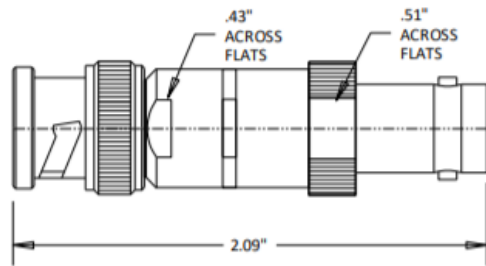

TECHNICAL & MECHANICAL SPECIFICATIONS

Frequency Range	0-2 GHz
VSWR	1.30 Max
Insertion Loss	6 dB
BNC Interface per	MIL-STD-348B
MATERIALS	
Body	Tri-Alloy Plated Brass
Contacts	Brass(Male) Phosphor Bronze (Female)
Contact Plating	Suco PRO
Dielectric	PTFE
ROHS Compliant	Yes