


SRFS TELEINFRA



BNC/Male 50 Ohm to BNC/Male 75 Ohm Impedance Matching Pad 2 GHZ

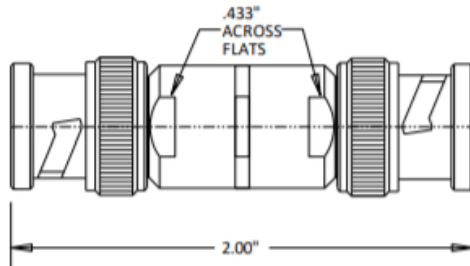

TECHNICAL & MECHANICAL SPECIFICATIONS

Frequency Range	0-2 GHz
VSWR	1.30 Max
Insertion Loss	6 dB
BNC Interface per	MIL-STD-348B
MATERIALS	
Body	Nickel Plated Brass
Contacts	Brass
Contact Plating	SucoPRO
Dielectric	PTFE
ROHS Compliant	Yes



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 ✉ info@srfsteleinfra.in, info@srfsteleinfra.com

 www.srfsteleinfra.in