


F/Female 75 Ohm to SMA/Female 50 Ohm Impedance Matching Pad 2 GHZ

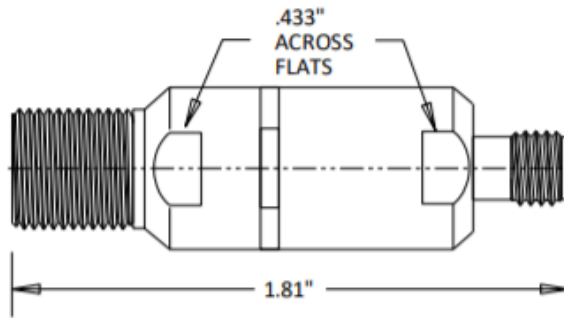

TECHNICAL & MECHANICAL SPECIFICATIONS	
Frequency Range	0-2 GHz
VSWR	1.30 Max
Insertion Loss	6dB
SMA Interface per	MIL-STD-348B
MATERIALS	
Body	Nickel Plated Brass
Contacts	BeCu
Contact Plating	SucoPRO
Dielectric	PTFE
ROHS Compliant	Yes