


Feeder clamp (7/8 Type)

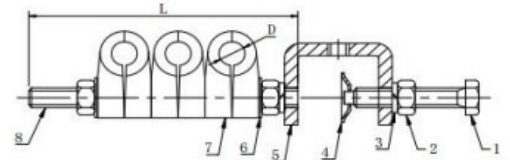

Electrical & Mechanical Specifications

Application	¼, 1/2, 7/8, 5/4, 13/8, ½ s, etc
Clamping Force	≥ 10N (Cable Dia. ≤ 16mm) ≥ 20N (Cable Dia. 16-28.5mm) ≥ 40N (Cable Dia. > 28.5mm)
Plastic Compression Strength	≥ 350N (Cable Dia. ≤ 16mm) ≥ 800N (Cable Dia. > 16mm)
C-Frame Capacity	≤ 27 mm
Low Temperature	-40±3 degree Celsius
High Temperature	70±2 degree Celsius
Salt Spray Chamber	(Neutral) ≥ 96 Hours
UV Resistance	72 Hours
ROHS Compliant	Yes