


SRFS TELEINFRA

N/Male 50 Ohm to F/Female 75 Ohm Impedance
Matching Pad 2 GHZ

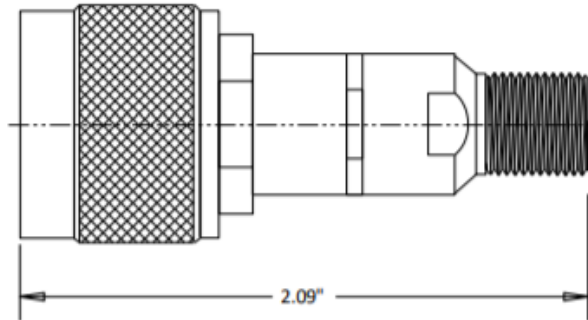

TECHNICAL & MECHANICAL SPECIFICATIONS

Frequency Range	0-2 GHz
VSWR	1.30 Max
Insertion Loss	6dB
SMA Interface per	MIL-STD-348B

MATERIALS

Body	Nickel Plated Brass
Contacts	Brass(Male) , BeCu(Female)
Contact Plating	SucoPRO
Dielectric	PTFE
ROHS Compliant	Yes