


N/Male 75 Ohm to N/Female 50 Ohm Impedance Matching Pad 2 GHZ

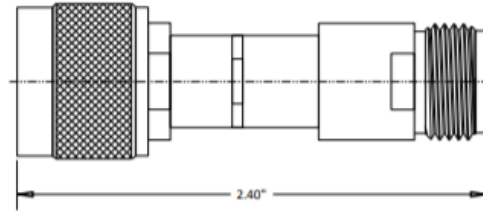

TECHNICAL & MECHANICAL SPECIFICATIONS

Frequency Range	0-2 GHz
VSWR	1.30 Max
Insertion Loss	6dB
N Interface per	MIL-STD-348B

MATERIALS

Body	Nickel Plated Brass
Contacts	Brass(Male) BeCu(Female)
Contact Plating	Au 50μ" Min
Dielectric	PTFE
ROHS Compliant	Yes