


Spring Type Grounding Kit

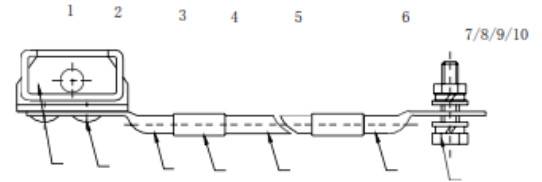

Piece Parts	Size	Materials
Grounding Strap	1/4" ~ 1-5/8"	Copper, SUS304
Rivet Kit	5.5*5	Copper
Cable Lug	M6	Copper, Tin-plated
Heat Shrinkable	Tube $\Phi 9 \times 30$	Polyolefin
Grounding Cable	16mm ²	Copper(Conductor) PVC (Jacket)
Cable Lug	M8	Copper, Tin-plated
Outer Hex Bolt	M8*25	SUS304
Nut	M8	SUS304
Spring Washer	M8	SUS304
Plain Washer	M8	SUS304
Electrical & Mechanical Specifications		
Contact Resistance	$\leq 5m\Omega$	
Current Shock Withstanding	$\geq 20KA(8/20\mu s)$	
Insulation Resistance	10G Ω	
Low Temperature	$-40 \pm 3^{\circ}C$	
High Temperature	$70 \pm 2^{\circ}C$	
ROHS Compliant	Yes	