

# SRFS TELEINFRA

SRFS-DK-3094S-360 Series



Anti-Drone UAV Jammer 12 Bands, Cover 360 Degree 1000-3000 Meters

Easy to Install in few minutes

<b>DK-3094S-360 12 Bands</b>	
<b>4 x Sectors: Each Sector cover 90 degrees and has Three Bands</b>  <b>Total 12 bands</b>	<b>5.6-5.9GHz:10W</b>  WiFi 11.g, b, Bluetooth ( Vertical Polarization)
	<b>2.4-2.5GHz:20W</b>  WiFi 11.g, b, Bluetooth ( Vertical Polarization)
	<b>GPS L1 + GLONASS L1 :20W</b>  <b>1570-1620MHz</b>
<b>Total : 200 W (Each Sector 90 degree 50W)</b>	
<b>Option: 860-920MHz :20W, GPS L2 + Glonass L2:20W, 433MHz: 20W</b>	
<b>Cover All 100% Commercial Drones / UAVs</b>  <b>Like DJI Phantom 4 Pro V2.0, Phantom 4, Phantom 3 Professional, Advanced, Standard series, Inspire Series...</b>  <b>Adjustable Output Power each Band/Channel, Max Output Power to 0 (OFF)</b>  <b>100% Safe VSWR over protection (Isolator) for each modular</b>  <b>Ethernet interface for control of Jammers ON/OFF (Wireless Option, too)</b>	
<b>Operator are able to remotely control each band output power and On/Off by Software on Computer (RJ45 Ethernet connection, Ethernet Remote Control)</b>	
<b>Power supply:</b>	<b>AC110 or 220-240V /DC 27V (options External Battery B-50AH See Photo)</b>
<b>Jamming Range</b>	<b>Radius 1000~2000 Meters</b>
<b>Weight</b>	<b>8kg</b>
<b>Dimension:</b>	<b>Diameters <math>\Phi</math>560mm Height: 210mm</b>
<b>Working time:</b>	<b>Without the time limit, May continue to work,</b>
<b>Antenna</b>	<b>Built-in Antennas</b>
<b>Warranty:</b>	<b>1 year</b>



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 [info@srfsteleinfra.in](mailto:info@srfsteleinfra.in), [info@srfsteleinfra.com](mailto:info@srfsteleinfra.com)

[www.srfsteleinfra.in](http://www.srfsteleinfra.in)

### ANTENNA Specification


Electrical Specifications			
Frequency Range	5150-5875MHz	2400-2500MHz	1575-1620MHz
Gain	7.5dBi	7.3dBi	7.3 dBi
VSWR	≤2.0	≤1.5	≤1.5
Polarization	Vertical	Vertical	Vertical
Horizontal beamwidth	90	90°	90°
Vertical beamwidth	25°	26°	280°
Front to back ratio	≥25dB	≥25dB	≥24dB
Input Impedance	50Ω	50Ω	50Ω
Max Input Power	50W	50W	50W
Temperature	-40 °C to +60 °C	-40 °C to +60 °C	-40 °C to +60 °C



# SRFS TELEINFRA



SRFS-3094S-360 Series

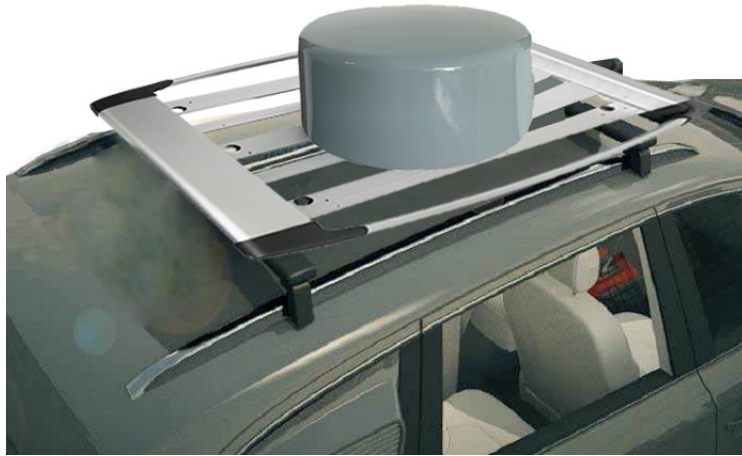

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 ✉ [info@srfsteleinfra.in](mailto:info@srfsteleinfra.in), [info@srfsteleinfra.com](mailto:info@srfsteleinfra.com)

[www.srfsteleinfra.in](http://www.srfsteleinfra.in)