


SRFS TELEINFRA



SRFS-PDK-3071G Anti-Drone Jammer
Portable GPS Jammer, Max 40W, 4 Bands,80 mins Built-in
Battery, 4 Bands in One Directional Antenna

PDK-3071G 4 Bands	
Four Bands in One Directional Antenna	1570-1620Hz:10W GPS L1 + Glonass L1 + BeiDou + GALILEO
	1220-1290MHz:10W GPS L2 + Glonass L2 + BeiDou + GALILEO
	1370-1390MHz :10W GPS L3 + GLONASS L4
	1160-1210MHz: 10W GPS L5 + BeiDou + GALILEO
	Total : 40 W
100% Safe VSWR over protection (Isolator) for each modular	
Battery LED Status	
Power supply:	AC Charger adapter (AC220V/110V)
Jamming Range:	Radius 500~1000 Meters
Battery Operating Time	80 Minutes
Dimension: 260 x 260 x 70 mm (H x W x D)	
Weight: 2.7 Kg (approximately)	
Operating temperature: -20°C ~ +60°C	

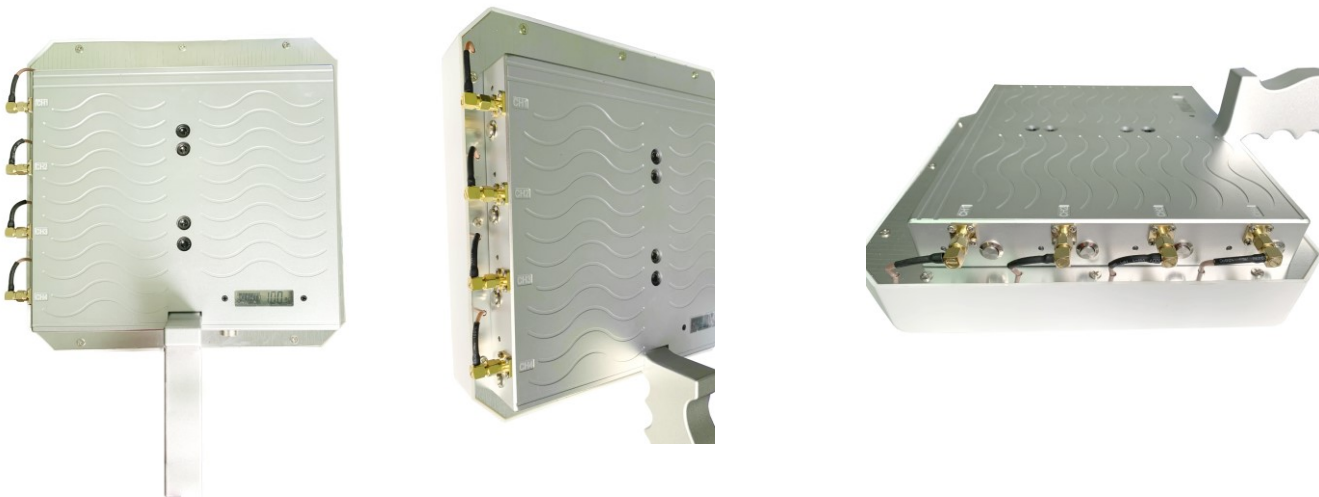

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in

SRFS TELEINFRA



SRFS-PDK-3071G Anti-Drone Jammer

Four Bands in One Directional Antenna Specification

Electrical & Mechanical Specifications				
Characteristics Impedance	50 Ohm	50 Ohm	50 Ohm	50 Ohm
Frequency Range	1575-1620MHz	1220-1290MHz	1370-1390MHz	1160-1210MHz
VSWR	≤1.5	≤1.5	≤1.5	≤1.5
Gain	8dBi	8dBi	8dBi	8dBi
Front to Back Ratio	≥24dB	≥24dB	≥24dB	≥24dB
Polarization	Vertical	Vertical	Vertical	Vertical
Horizontal 3dB Beam Width	65°	65°	65°	65°
Vertical 3dB Beam Width	55°	55°	55°	55°
Maximum Input Power	50W	50W	50W	50W
Double 2.4GHz 10W block much longer Good Isolation each other (4 bands in)				
Lightning Protection	Direct Ground			
Connector	N-M			
Weight	1.1 kg			
Dimensions	255*255*45mm			
Radiator Material	Alumina			
Radome Material	Black			



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in