


SRFS TELEINFRA



3-Way Power Splitter (698-4000MHz)

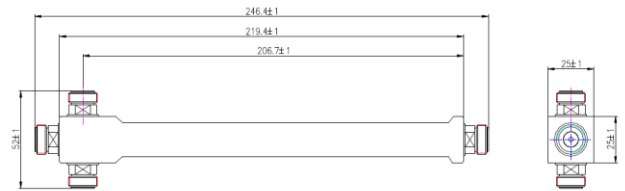

Product Features:

- Wide Frequency Band 698-4000MHz
- 2G/3G/4G/LTE/5G Coverage
- Low Passive Inter-modulation
- Low VSWR & Insertion Loss
- Indoor & Outdoor Application IP65
- Widely used for In-building Solutions

Electrical & Mechanical Specifications

Freq(MHz)	698-4000
Input Port Number	1
Output Port Number	3
Split Loss(dB)	4.8
IL(dB)	≤0.5
VSWR	≤1.25
3rd PIM (dBc)	≤-150dBc@2*43dBm
Average Power(W)	300
Impedance	50 Ohm
Connector	N-Female
Color	Weight Black
Temp(deg)	-35~+65
Application	Indoor & Outdoor IP65
Relative Humidity	5%-95%



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in