

SRFS TELEINFRA



698-4000MHz N-F 2 In 2 Out Hybrid Combiner



Electrical & Mechanical Specifications

Frequency	690MHz- 40 00MHz
Insertion Loss	$\leq 3.6\text{dB}$
VSWR	≤ 1.25
Isolation	$\geq 25\text{dB}$
PIM3	$\leq -150\text{dBc}@2\times 43\text{dBm}$
Power	300W
Impedance	50 Ω
Connector	N- F
Operating Temperature	- 20 ~ +55 $^{\circ}\text{C}$
Appearance	Black Paint



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059


+91-9027232570, +91-7838349349 ✉ info@srfsteleinfra.in ,info@srfsteleinfra.com

 www.srfsteleinfra.in

SRFS TELEINFRA



698-4000MHz N-F 2 In 2 Out Hybrid Combiner

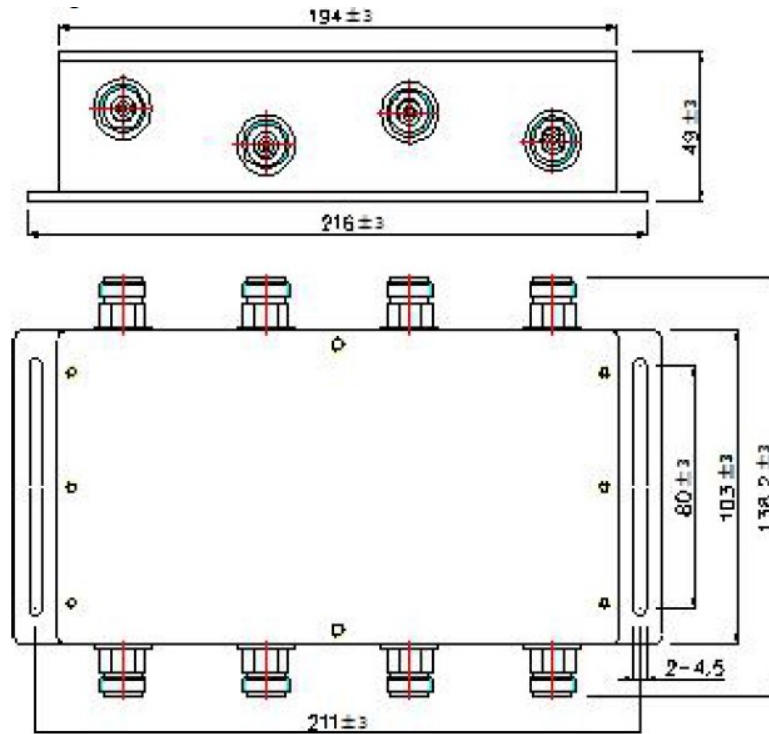

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-7838349349 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in