

SRFS TELEINFRA



698-4000MHz N-F 4 In 4 Out Hybrid Combiner



Electrical & Mechanical Specifications	
Frequency Range	698 - 4000MHz
Insertion Loss	≤6 dB
Isolation	>23dB
PIM(I M3)	<-150dBc @ +43dBm×2
VSWR	≤1.25
Power Rating	500W
Operating Temperature	- 20 °C to 70°C
Relative Humidity	0 to 95%
Applied Environment	IP65, Indoor or Outdoor
Connectors Type	N-Female
Weight	1.65Kg

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059


+91-9027232570, +91-7838349349 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in

SRFS TELEINFRA



698-4000MHz N-F 4 In 4 Out Hybrid Combiner

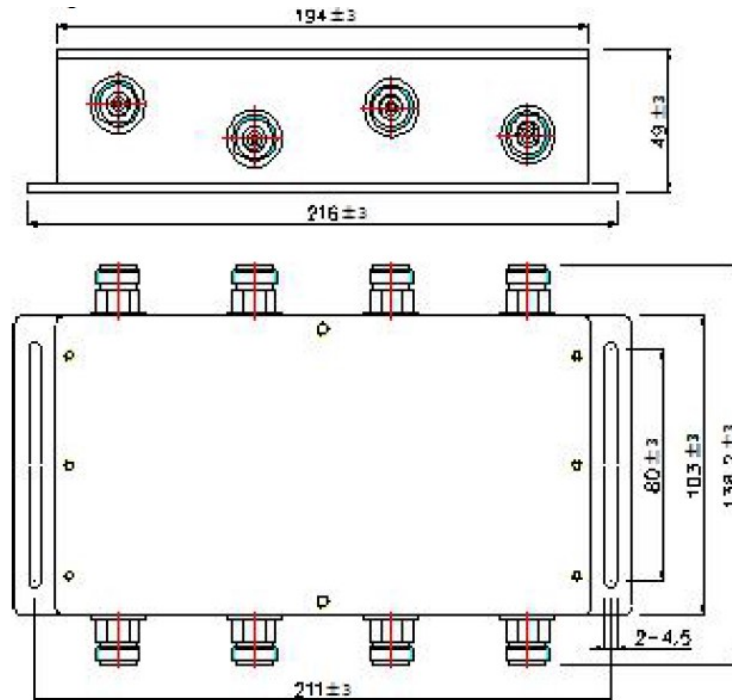

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-7838349349 ✉ info@srfsteleinfra.in, info@srfsteleinfra.com

 www.srfsteleinfra.in

