


SRFS TELEINFRA




Bulb Omni Antenna 4 dBi 698-2700 MHz



| Electrical Specifications | |
|---------------------------|-----------------------|
| Frequency Range | 698-960/1710-2700 MHz |
| Gain | 2±0.5/4±0.5 dBi |
| VSWR | ≤ 1.8/≤1.5 |
| Horizontal Beam Width (°) | 70/40±10 |
| Vertical Beam Width (°) | 2±0.5/4±0.5 |
| Inter Modulation IM3(dBc) | ≤-130dBc@2x43dBm |
| Maximum Input Power(W) | 100 |
| Polarization | Vertical |
| Interface | N-Female with Pigtail |
| Lightning Protection | DC Ground |
| Mechanical Specification | |
| Mounting | Ceiling Mount |
| Pigtail Length (mm) | 250 |
| Application | Indoor |
| Operating Temperature | -40°C ~55°C |
| Relative Humidity (%) | 5 to 95% |
| Dimension(mm) | φ185×85 |
| Weight (kg) | 0.32 |

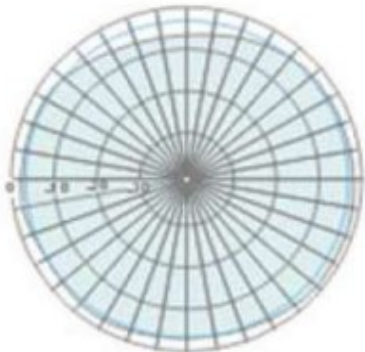

H - Plane

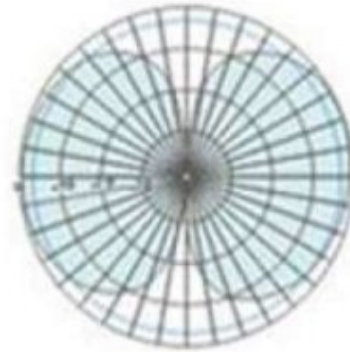

E - Plane



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 ✉ info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in