

SRFS TELEINFRA




Mimo Omni Antenna

Indoor double port MIMO omni-directional ceiling antenna

Model No: SRFS-O-698/4000-2/5-SN10

ELECTRICAL SPECIFICATIONS		
Frequency Range(MHz)	698-960	1710-4000
VSWR	≤1.8	≤1.8
Input Impedance(Ω)	50	50
Polarization	V	V
Gain(dBi)	2	3~5
Horizontal-3dB Beamwidth($^{\circ}$)	360	
Vertical-3dB Beamwidth($^{\circ}$)	85~35	
Intermodulation IM3(2X33dBm)	≤-155dBc	
Max Input Protection(W)	50	
Connector	2x N-F	
Lighting Protection	DC Ground	
MECHANICAL SPECIFICATIONS		
Antenna Dimension(mm)	Φ220*45	
Weight(kg)	0.5	
Cover Material	ABS	
Operating Temperature($^{\circ}$)	-40~+60	

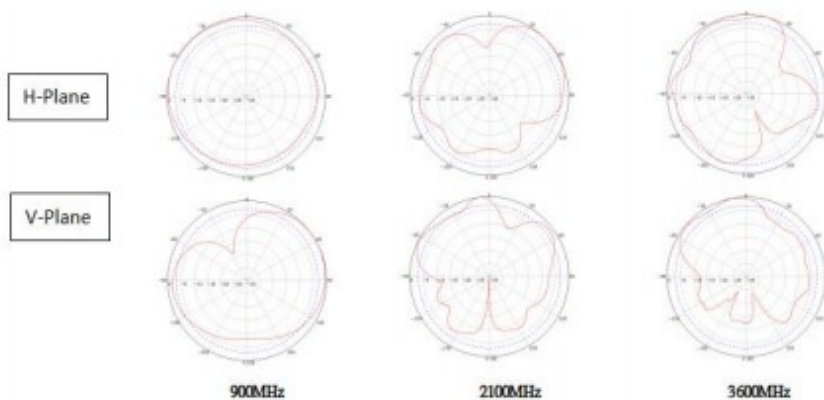

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-7838349349 info@srfsteleinfra.in, info@srfsteleinfra.com



www.srfsteleinfra.in

SRFS TELEINFRA



Mimo Panel antenna: 2-Port Indoor 65°/7/9dBi
MIMO Panel Antenna Model No:SRFS-D-
698/4000-7/9-SN57

ELECTRICAL SPECIFICATIONS				
Frequency range(MHz)	698~864	870~960	1710~2700	3300-4000
Gain(dBi)	5.5	6.5	8.5	7.5
VSWR	≤2.0		≤1.8	
Isolation(dB)	20			
Polarization	V/H			
Input Impedance	50Ω			
Intermodulation	≤-155 (2 x 33 dBm carrier)			
Horizontal Beamwidth (°)	90	90	65	55
Vertical Beamwidth (°)	75	70	60	35
Input Power per Port(W)	50			
Connector	2 x N-F			
Dimensions(mm)	295X180X70			
Weight(kg)	0.8			
Cover Material	ABS			
Operating Temperature(°C)	-40~+60			

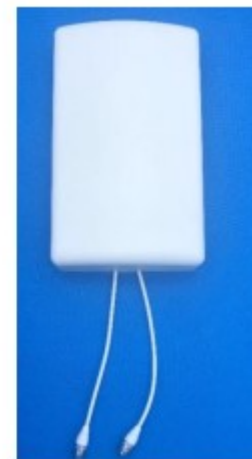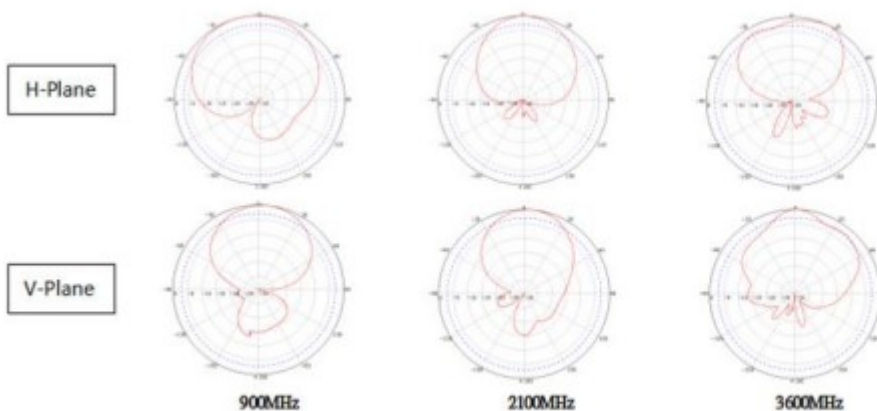

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-7838349349 ✉ info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in