


SRFS TELEINFRA



SMA Female Straight Bulkhead 1.13mm cable (15 cm) UFL

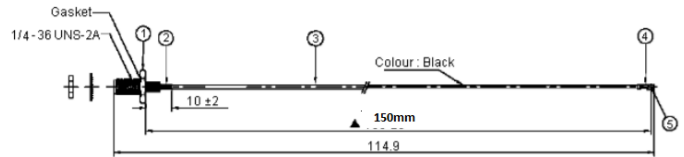

Electrical Specifications	
Impedance (nominal) :	50Ω
Capacitance (nominal) :	3.43dB/m (at 3GHz); 5.13dB/m (at 6GHz)
Insulation resistance :	500MΩ (Min.)
Dielectric Withstanding Voltage :	60V AC (rms)
Mechanical Specification	
Cable diameter (Max.) :	1.37mm (options of 1.32mm double screened cable)
Cable bend radius (Min.) :	16mm (for 1.37mm)
Temperature range :	-40°C to +90°C
Mating torque (Max.) :	0.245 N-m
Cable lengths (standard) :	150 mm or Customized



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-7838349349 ✉ info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in