


SRFS TELEINFRA



2 Way Power Splitter 698 ~ 2700 MHz

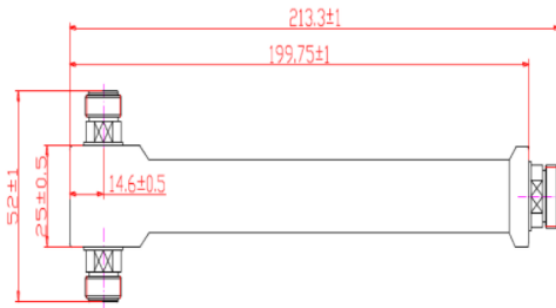

Electrical & Mechanical Specifications	
Freq(MHz)	698MHz -2700MHz
Insertion Loss	≤3.3dB
VSWR	≤1.25
In-Band Ripple	≤0.3dB
PIM3	≤-150dBc@2×43dBm
Power	200W
Impedance	50Ω
Connector	N-F
Operating Temperature	-20~+55°C
Appearance	Black Paint
Application	Indoor / Outdoor