


# SRFS TELEINFRA



## 1dB 2W DC18GHz SMA Male to Female Attenuator ( SRFS2W18GHZ1dB)



ELECTRICAL&MECHANICAL SPECIFICATIONS		
Frequency	DC~18GHz	
Impedance	50Ω	
VSWR Maximum	1.30:1	
RF Connectors	SMA Male to Female	
Attenuation	1 ± 0.3dB	
Power Input	2Watt	
Durability Mating cycle	≥500	
MATERIAL&PLATING		
	Material	Plating
Body	Brass	Gold
Coupling Nut	Brass	Gold
Pin Contacts	Beryllium Copper	Gold
Insulators	Teflon	
ENVIRONMENTAL SPECIFICATIONS		
Temperature Range	-45°C – +125 °C	

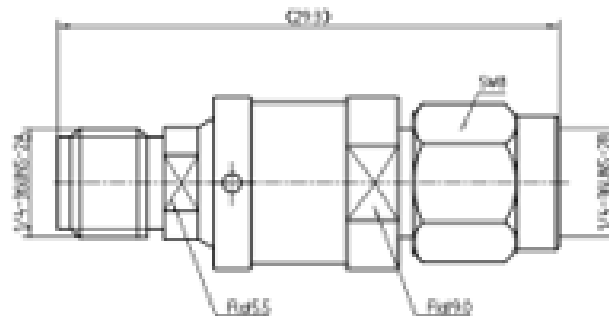

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-7838349349 ✉ [info@srfsteleinfra.in](mailto:info@srfsteleinfra.in), [info@srfsteleinfra.com](mailto:info@srfsteleinfra.com)

[www.srfsteleinfra.in](http://www.srfsteleinfra.in)