


SRFS TELEINFRA



2:1 Hybrid Combiner

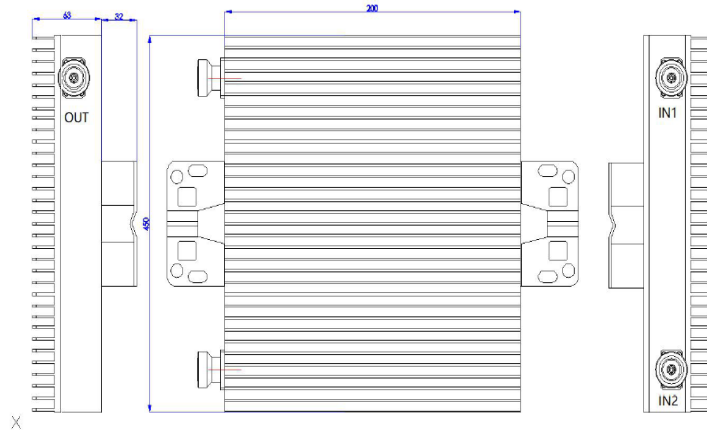

Electrical Specifications	
Frequency Range	100-1000MHz
Input Avg. Power, Max at each port	200W
Insertion Loss	$\leq 4.5\text{dB}$
Isolation between bands	$\geq 18\text{dB}$
VSWR	≤ 1.3
PIM3	$< -150\text{dBc}@2 \times 43\text{dBm}(900\text{MHz})$
Impedance	50 Ohm
Mechanical Specifications	
Interface	N Female
Weight (Expected)	2.5kg
IN Port	2 Nos.
OUT Port	1 Nos.
Color	Black
Environmental Specification	
Operating Temperature	(°C) -30~+60
Relative Humidity	$\leq 95\%$
Applications	Indoor
Water Proof Grade	IP55



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-7838349349 ✉ info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in