


4:1 Hybrid combiner

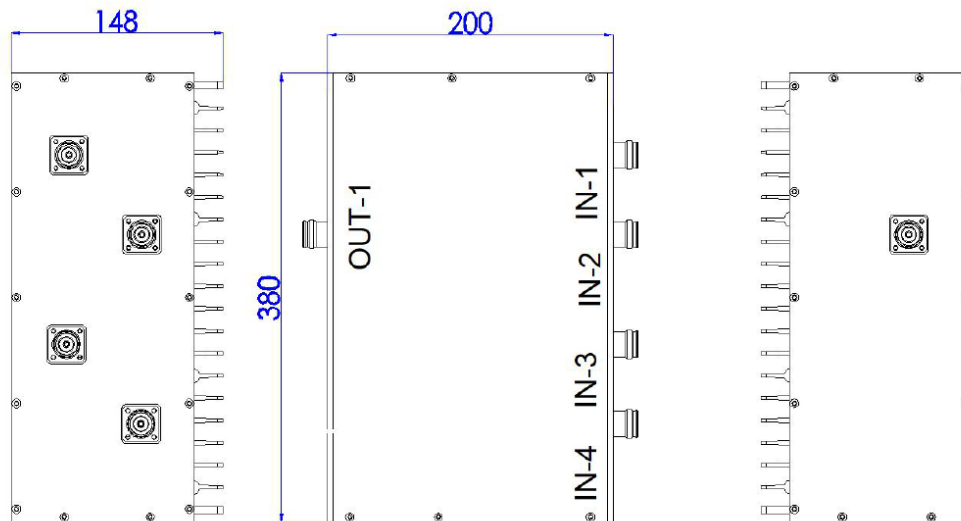

Electrical Specifications	
Frequency Range	100-1000MHz
Input Avg. Power, Max at each port	200W
Insertion Loss	$\leq 8.5\text{dB}$
Isolation between bands	$\geq 16\text{dB}$
VSWR	≤ 1.4
Impedance	<u>50 Ohm</u>
Mechanical Specifications	
Interface	N Female
Weight (Expected)	2.5kg
IN Port	4 Nos.
OUT Port	1 Nos.
Color	Black
Environmental Specification	
Operating Temperature	(°C) -30~+60
Relative Humidity	$\leq 95\%$
Applications	Indoor
Water Proof Grade	IP55