


# SRFS TELEINFRA

5 dB 100~1000 MHz (SRFS-SP4 100-1000)

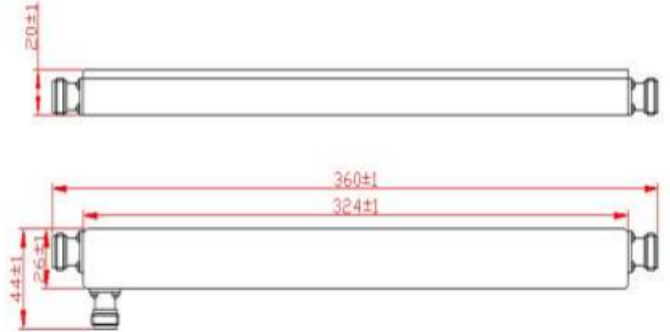

## ELECTRICAL&MECHANICAL SPECIFICATIONS

Characteristics Impedance	50 ohm
Frequency Range	100-1000 MHz
Coupling	5 dB
Ripple in Band(dB)	+ 1.0
Insertion Loss(dB)	<2.3
VSWR	<1.3
PIM	≤-150dBc@+43dBm x 2
Directivity (dB)	>15
Power	200 W
Connector	N F
Temperature(°C)	-20 ~85
Relative Humidity	5%~95%
Application Indoor & Outdoor	IP65



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 [info@srfsteleinfra.in](mailto:info@srfsteleinfra.in), [info@srfsteleinfra.com](mailto:info@srfsteleinfra.com)

[www.srfsteleinfra.in](http://www.srfsteleinfra.in)