

SRFS TELEINFRA

Coaxial Adapters SRFSAPS



Features:


- * Low VSWR

Applications:


- * Wireless
- * Laboratory Test
- * Radar
- * Transmitter




Outline Drawings




Outline A

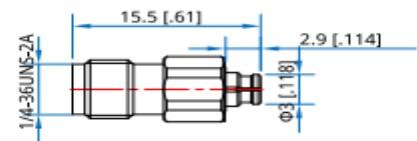


Outline B




Outline C




Outline D



Outline E

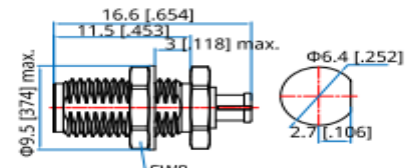

Outline F



Outline G



Electrical & Mechanical Specifications	
Frequency:	DC~26.5GHz DC-18GHz(bulk head)
VSWR:	1.25 max.
Impedance:	50Ω
RF Connectors:	SMP , SMA
Mating Life Cycle:	500 cycles
Outer Conductor:	Passivated Stainless Steel
Dielectric:	PTFE
Inner Conductor:	Gold Plated Beryllium Copper
Temperature:	-55~+85°C

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]