


2 in 1 out Hybrid Combiner-698-4000MHz N-F



Electrical and Mechanical Specifications	
Frequency range	698MHz -4000MHz
Insert loss	$\leq 3.8\text{dB}$
In-band ripple	$\leq 1.0\text{dB}$
VSWR	≤ 1.30
Isolation	$\geq 20\text{dB}$
PIM3	$\leq -150\text{dBc}@2\times 43\text{dBm}$
Power	$\geq 300\text{W}$
Impedance	50 Ω
Connector	N-F
Degree of protection	IP65
Appearance	Black paint
Relative humidity	$\leq 95\%$
Operating Temperature($^{\circ}\text{C}$)	-35°C to $+75^{\circ}\text{C}$

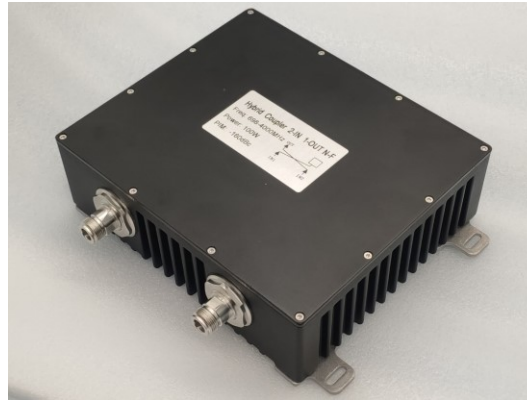