


SRFS TELEINFRA



2 in 1 out combiner-698-4000MHz N-F

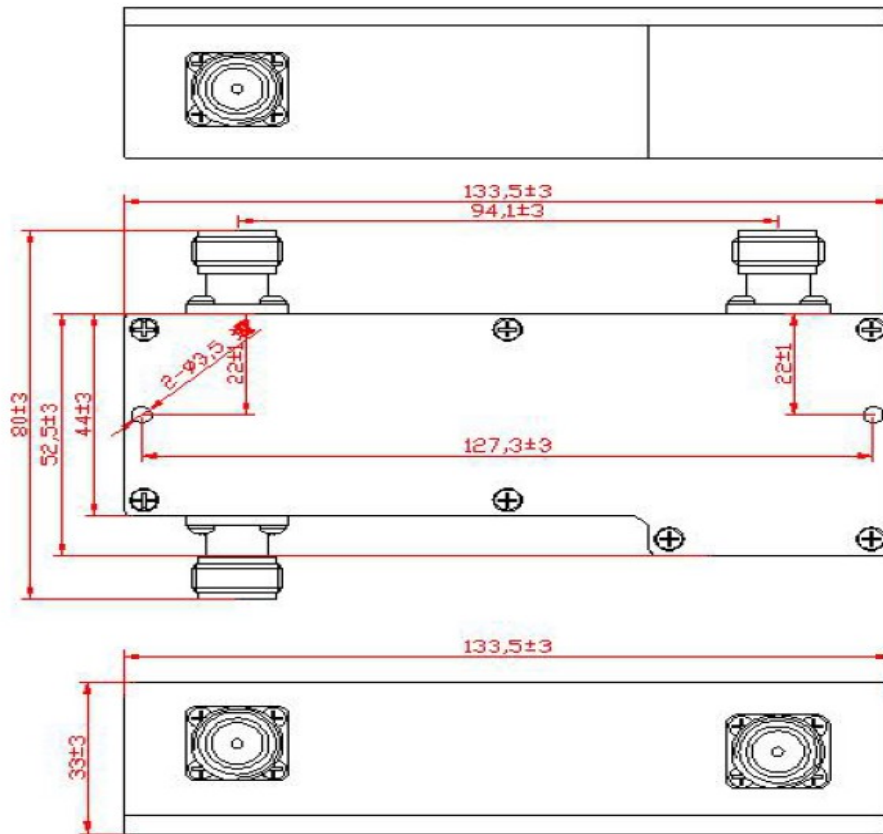

Electrical and Mechanical Specifications	
Frequency range	698MHz -4000MHz
Insert loss	≤3.8dB
In-band ripple	≤1.0dB
VSWR	≤1.35
Isolation	≥20dB
PIM3	≤-120dBc@2×43dBm
Power	50W
Impedance	50Ω
Connector	N-F
Degree of protection	IP65
Appearance	Black paint



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-7838349349 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in