


## 4 IN 1 OUT N-F COMBINER

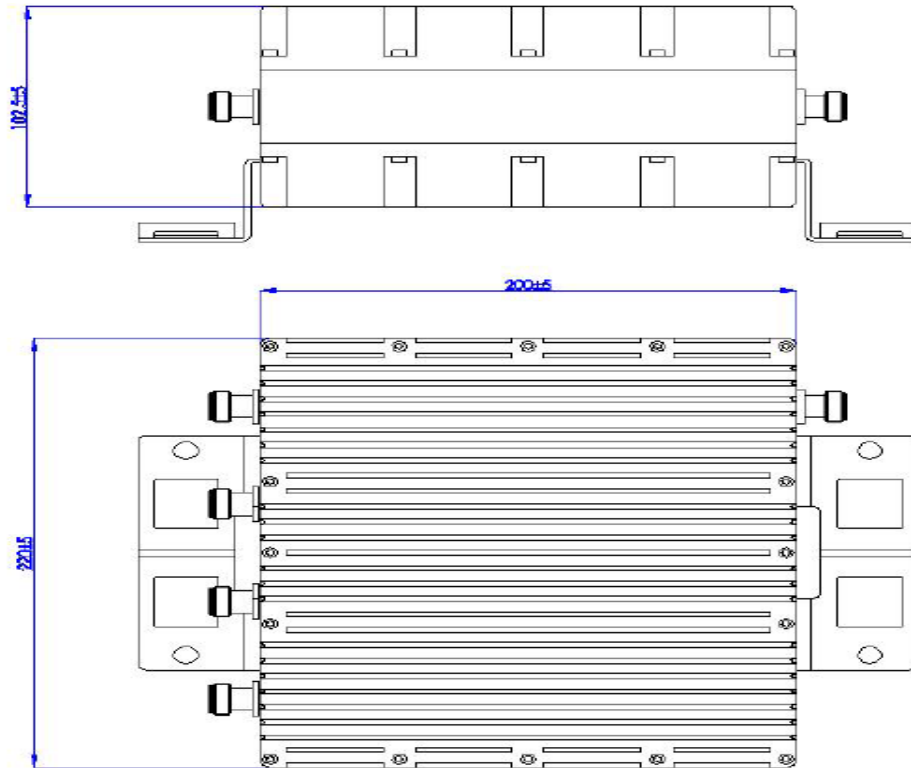

Electrical and Mechanical Specifications	
Frequency range	698 - 4000MHz
Insert loss	≤7.5dB
Isolation	>20dB
PIM (IM3)	<-150dBc @ +43dBm×2
VSWR	≤1.25
Power Rating	300W
Operating Temperature	-20°C to 70°C
Relative Humidity	0 to 95%
Applied Environment	IP65, Indoor or Outdoor
Connectors Type	N-Female
Port	4 Inport;1 Output
Finish	Black paint
Package	Single box