



SRFS TELEINFRA

902-928MHZ 9DBI RFID PANEL ANTENNA

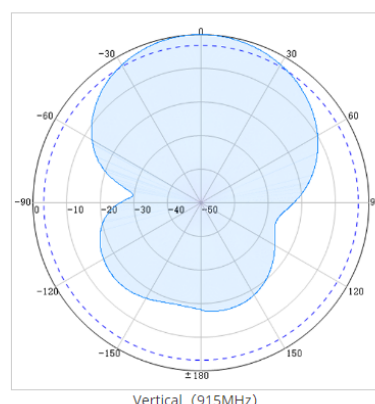

Electrical & Mechanical Specifications			
Frequency Range	902-928 MHz	902-928 MHz	902-928 MHz
Gain	9 dBi	9 dBi	9 dBi
VSWR	≤ 1.3	≤ 1.3	≤ 1.3
Polarization	Circular	Horizontal	Vertical
Horizontal Beam width	68°	59°	70°
Vertical Beam width	59°	65°	58°
Input Impedance	50 Ω	50 Ω	50 Ω
Max. Input Power	50W	50W	50W
Lightning Protection	DC Ground	DC Ground	DC Ground
Connector	N- Female	N- Female	N- Female
Dimensions	305×305×30 mm	305×305×30 mm	305×305×30 mm
Weight	1.0 kg	1.0 kg	1.0 kg
Reflector Material	Aluminum	Aluminum	Aluminum
Radome Material	ABS	ABS	ABS
Ingress Protection	IP65	IP65	IP65
Operating Temperature	-40°C to +65°C	-40°C to +65°C	-40°C to +65°C
Mounting Pole	Ø38-Ø52 mm	Ø38-Ø52 mm	Ø38-Ø52 mm

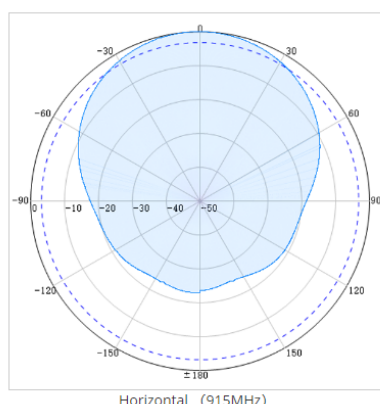

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in