


SRFS TELEINFRA


902-928MHZ 9DBI RFID PANEL ANTENNA



Electrical & Mechanical Specifications			
Frequency Range	902-928 MHz	902-928 MHz	902-928 MHz
Gain	9 dBi	9 dBi	9 dBi
VSWR	≤1.3	≤1.3	≤1.3
Polarization	Circular	Horizontal	Vertical
Horizontal Beam width	71°	66°	72°
Vertical Beam width	62°	72°	64°
Input Impedance	50 Ω	50 Ω	50 Ω
Max. Input Power	50W	50W	50W
Lightning Protection	DC Ground	DC Ground	DC Ground
Connector	N- Female	N- Female	N- Female
Dimensions	260×260×45 mm	260×260×45 mm	260×260×45 mm
Weight	1.0 kg	1.0 kg	1.0 kg
Reflector Material	Aluminum	Aluminum	Aluminum
Radome Material	ABS	ABS	ABS
Ingress Protection	IP65	IP65	IP65
Operating Temperature	-40°C to +60°C	-40°C to +60°C	-40°C to +60°C
Mounting Pole	Ø38-Ø52 mm	Ø38-Ø52 mm	Ø38-Ø52 mm

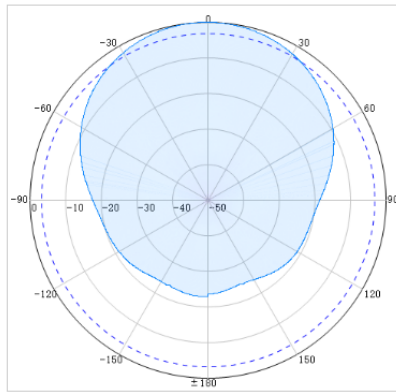

Horizontal (915MHz)

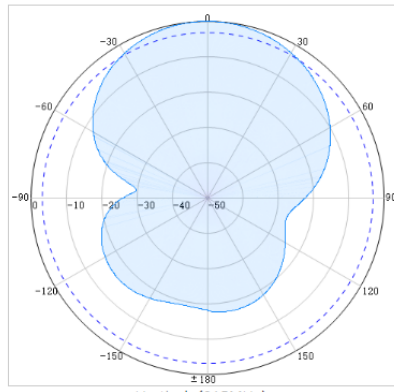

Vertical (915MHz)



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in