SRFS TELEINFRA

WR28 Waveguide Termination SRFS320WL1.03PC

Features:

- Full Waveguide Band Coverage
- Max VSWR of 1.03
- 1 Watts CW & 1 Kilo-Watts Peak

Applications:

- Communication & Radar Systems
- Microwave Radio Systems
- R&D Labs

Electrical & Mechanical Specifications	
Frequency range	26.5 - 40.0 GHz
VSWR (Max)	1.03
Average Power	1 W
Peak Power	1 kW
Waveguide Type	WR28
Flange Type	UBR
Material	Copper/Brass
Inside Finish	Silver plating
Outside Finish	Anticorrosion grey paint
Length	L=50 mm
Weight	0.02 kg
Operating Temperature	-30° ~+70°C
Storage Temperature	-40° ~+85°C

Outline Drawings (Unless otherwise specified, all dimensions are in millimeters)

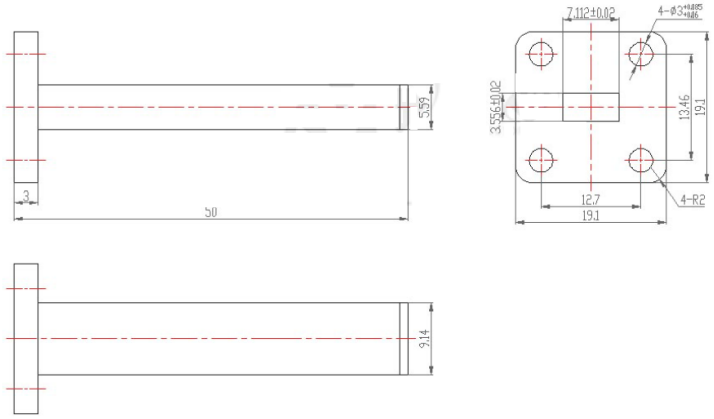

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 info@srfsteleinfra.in,info@srfsteleinfra.com

www.srfsteleinfra.in