


SRFS TELEINFRA



PATCH ANTENNA 8/9 dBi 600-4000 1FEET N F

Part No.- SRF06111105840

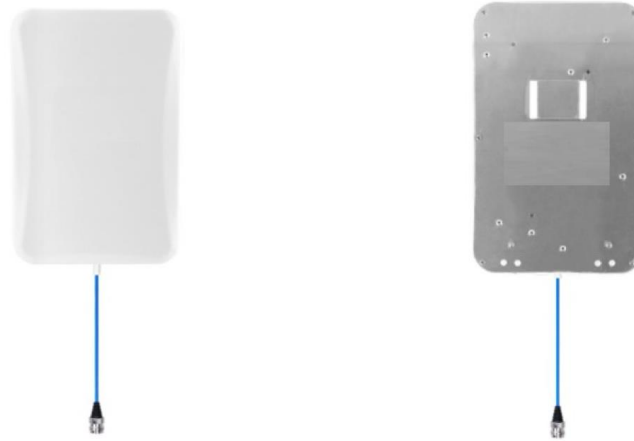

ELECTRICAL SPECIFICATIONS				
Frequency Range(MHz)	600-698	700-960	1710-2700	3300-4000
Gain(dBi)	8.0 $\pm$ 1	8.0 $\pm$ 1	9 $\pm$ 1.0	9 $\pm$ 1.0
VSWR	$\leq$ 2.1	$\leq$ 1.8	$\leq$ 1.8	$\leq$ 1.8
Isolation(dB)	>20	>20	>23	>23
Horizontal Beam Width	75	75	70	68
Vertical Beam Width	70	70	70	60
PIM,3 rd Order, 2X20 W,	<-150dBc			
Input Power, maximum	100Watts			
Impedance	50 Ohms			
MECHANICAL SPECIFICATIONS				
Connector	N-Female			
Dimensions(H x W x D)	350x285x90			
Net Weight(kg)	2.8			
Weight(kg)	0.5			
Mounting Kit	Ceiling, via hole(standard)			
Radome Material	ABS, RAL9003			
Radome Color	White			
Mounting Kit	On Wall			
Operating Temperature(°C)	-55～60			



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-7838349349 ✉ info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in