


## 4 in 2 out Combiner (698-3800MHz, N-F)

### Product Feature:

- ◆ Wide Frequency Band 698-3800MHz
- ◆ 2G/3G/4G/LTE Coverage
- ◆ Low Passive Inter-modulation
- ◆ Low VSWR & Insertion Loss
- ◆ High Isolation, Indoor
- ◆ Widely used for In-building Solutions

Electrical and Mechanical Specifications	
Model No.	SRFS-738-42-NF
Freq(MHz)	698-3800
Insertion Loss(dB)	6.1+/-1.5
Isolation(dB)	≥22
VSWR	≤1.3
3rd PIM(dBc)	≤-120dBc@2*43dBm
Power(W)	200W
Impedance	50 ohm
Connector	N-Female
Color	Black
Temp(deg)	-35~+65
Relative Humidity	5%-95%

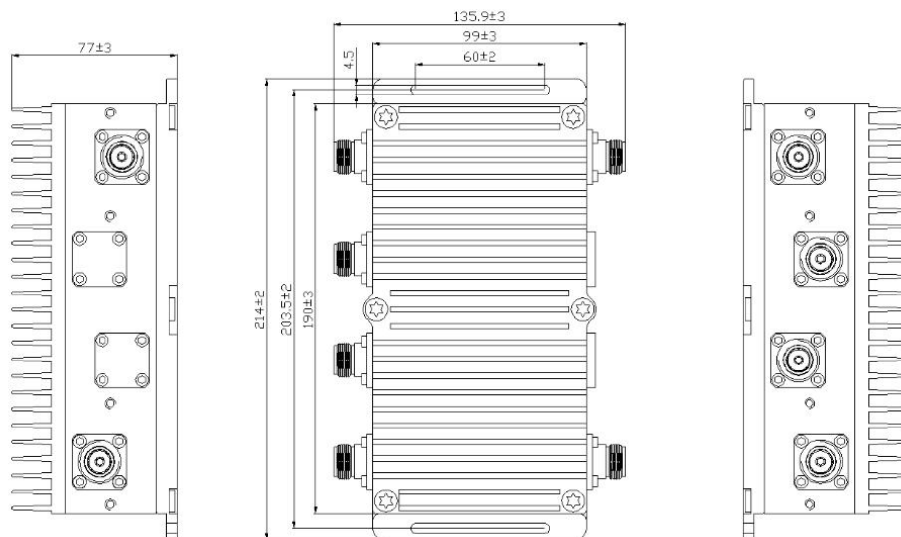

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-7838349349 [info@srfsteleinfra.in](mailto:info@srfsteleinfra.in), [info@srfsteleinfra.com](mailto:info@srfsteleinfra.com)

[www.srfsteleinfra.in](http://www.srfsteleinfra.in)