


High Voltage DC Block

Application:

High voltage SRFS DC02-03 DC blocks are widely used in the below fields:

- Mobile Communication Network Optimization and Indoor distribution system.
- Cluster communication, satellite communication, shortwave communication, and hopping radio.
- Radar, electronic navigation, and electronic confrontation.
- Aerospace equipment systems

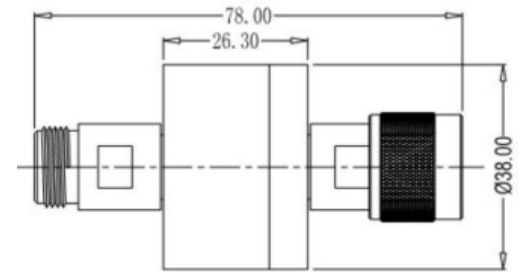

Tolerance : $\pm 2\%$

TECHNICAL SPECIFICATIONS	
Item	DC Block
Model	SRFS-DC02-03
Frequency	10-3000 MHz
Connector	N Male to N Female
VSWR	1.25:1
Power	200W
Impedance	50 Ohm
Blocking Voltage	3000V
Temperature Range	-55°C ~ +125°C
Dimension	76*38mm
Weight	198gm
Tolerance	+2%