


SRFS TELEINFRA

High Voltage N-MF DC BLOCKS

Application:

High voltage SRFS DC02-03 DC blocks are widely used in the below fields:

- Mobile Communication Network Optimization and Indoor distribution system.
- Cluster communication, satellite communication, shortwave communication, and hopping radio.
- Radar, electronic navigation, and electronic confrontation.
- Aerospace equipment systems

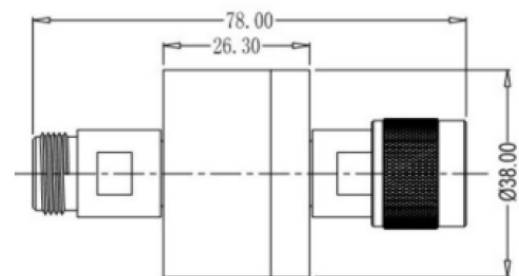

Tolerance : $\pm 2\%$

Electrical , Mechanical & Environmental Specification

| | |
|-------------------|--------------------|
| Frequency Range | DC~3GHz |
| Model | SRFS-DC02-03 |
| Connector | N Male to N Female |
| VSWR | 1.25:1 |
| Power | 200W |
| Impedance | 50Ω |
| Working Voltage | 3000V |
| Dimension | 76*38mm |
| Tolerance | $\pm 2\%$ |
| Weight | 198 gm |
| Temperature Range | -55°C ~ +125°C |

Add: plot no 10 shiv vihar a block Najafgarh Sahibi river road Vikasnagar Uttam nagar new delhi-110059

+91-9027232570, +91-8800726650, +91 8076749052 info@srfsteleinfra.in, info@srfsteleinfra.com, srfsteleinfra@gmail.com

www.srfsteleinfra.in, www.srfsteleinfra.com

SRFS Teleinfra | All specifications are subject to change.
SRFS reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.
It may be necessary to make modifications to the part and/or the documentation of the part to implement improvements.
See www.srfsteleinfra.in for the most current information. Revised: 19 Jan 2023

