

# SRFS TELEINFRA


Get connected with us:



## 2 in 1 out Hybrid Combiner-698-4000MHz N-F (Model No. SRFS-LPHC-21-5G)



Electrical and Mechanical Specifications	
Frequency range	698MHz -4000MHz
Insert loss	$\leq 3.8\text{dB}$
In-band ripple	$\leq 1.0\text{dB}$
VSWR	$\leq 1.30$
Isolation	$\geq 20\text{dB}$
PIM3	$\leq -165\text{dBc}@2\times 43\text{dBm}$
Power	$\geq 300\text{W}$
Impedance	$50\Omega$
Connector	N-F
Degree of protection	IP65
Appearance	Black paint
Relative humidity	$\leq 95\%$
Operating Temperature( $^{\circ}\text{C}$ )	$-35^{\circ}\text{C}$ to $+75^{\circ}\text{C}$

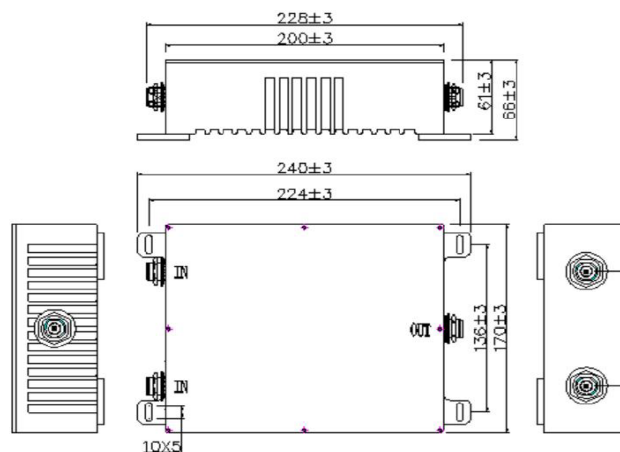

Add: plot no 10 shiv vihar a block Najafgarh Sahibi river road Vikasnagar Uttam nagar new delhi-110059

+91-9027232570, +91-8800726650, +91 8076749052 info@srfsteleinfra.in, info@srfsteleinfra.com, srfsteleinfra@gmail.com

www.srfsteleinfra.in, www.srfsteleinfra.com

SRFS Teleinfra | All specifications are subject to change.  
SRFS reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.  
It may be necessary to make modifications to the part and/or the documentation of the part to implement improvements.  
See www.srfsteleinfra.in for the most current information. Revised: 19 Jan 2023

