


SRFS TELEINFRA

698-4000 MHz 4:1 Hybrid Combiner (Model No. SRFS-HC-41-5G)

Get connected with us:



| Electrical and Mechanical Specifications | |
|--|-------------------------------------|
| Operating Frequency | 698-4000 MHz |
| Impedance | 50 Ohm |
| VSWR | 1.25 |
| Coupling | 6.1 dB |
| Insertion Loss | 1.3 dB |
| Isolation | ≥ 22 dB |
| IM3 (dBc @ 2×43 dBm) | -150 dBc |
| Application | Indoor/Outdoor |
| Operating Temperature | -40 to 80 °C |
| Interface | N Female /Din Female /4.3-10 Female |
| Handling Power | 500 W |
| Peak Power | 1200 W |
| Dimension (mm) (L × W × H, excl connector) | 216*103*71 mm |
| Net Weight | 2200 Gms |
| ROHS Compliance | Yes |

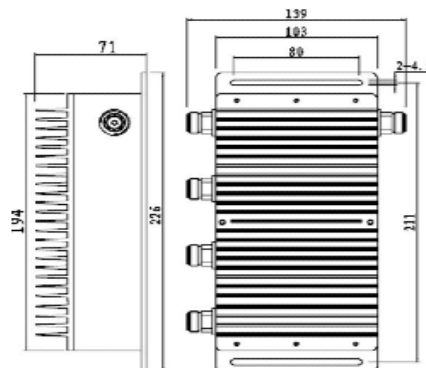

Add: plot no 10 shiv vihar a block Najafgarh Sahibi river road Vikasnagar Uttam nagar new delhi-110059

+91-9027232570, +91-8800726650, +91 8076749052 info@srfsteleinfra.in, info@srfsteleinfra.com, srfsteleinfra@gmail.com

www.srfsteleinfra.in, www.srfsteleinfra.com

SRFS Teleinfra | All specifications are subject to change.
SRFS reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.
It may be necessary to make modifications to the part and/or the documentation of the part to implement improvements.
See www.srfsteleinfra.in for the most current information. Revised: 19 Jan 2023

