SRFS TELEINFRA

Get connected with us:

SMA Female Bulkhead Right Angle Connector For P.C.B.

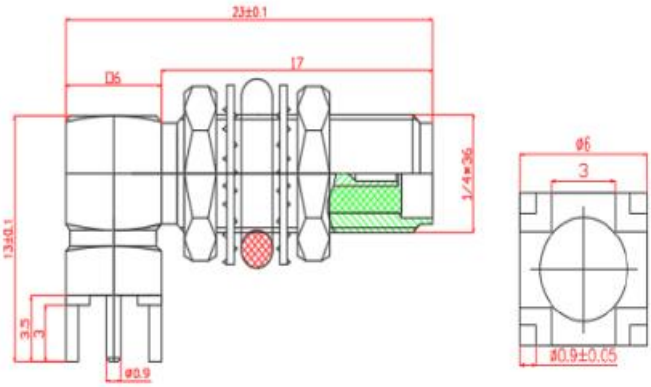

Electrical & Mechanical Specifications		
Frequency Range	DC-12.4GHz	
VSWR (max)	≤1.10@DC-3GHz	
Dielectric Withstanding Voltage	1000Vrms, 50Hz at sea level	
Working Voltage	335V RMS ,50Hz at sea level	
Input Impedance	50 Ω	
Contact Resistance	Center Contact ≤3mΩ Outer Contact≤2.5mΩ	
Dielectric Resistance	≥5000MΩ	
Durability	Mating Cycles ≥500	
Material & Plating		
	Material	Plating
Body	Brass	Au
Insulator	PTFE(Teflon)	-
Center conductor	Phosphor bronze	Au
Fastening Nut	Brass	Au
Washer	Brass	Au
Ferrule Annealed	Copper	Ni
Environmental Specification		
Temperature Range	-40°C~+85°C	
Waterproof Rate	IP 67	
RoHS	Compliant Yes	

Add: plot no 10 shiv vihar a block Najafgarh Sahibi river road Vikasnagar Uttam nagar new delhi-110059

+91 7838349349, +91 8076749052 info@srfsteleinfra.in, info@srfsteleinfra.in, srfsteleinfra@gmail.com

www.srfsteleinfra.in, www.srfsteleinfra.com

SRFS Teleinfra | All specifications are subject to change.
SRFS reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.
It may be necessary to make modifications to the part and/or the documentation of the part to implement improvements.
See www.srfsteleinfra.in for the most current information. Revised: 19 Jan 2023