


## SMA Female RA for LMR 200/RG 58 Crimp Connector Part No. SRFS-SMAFRACRLMR200-06

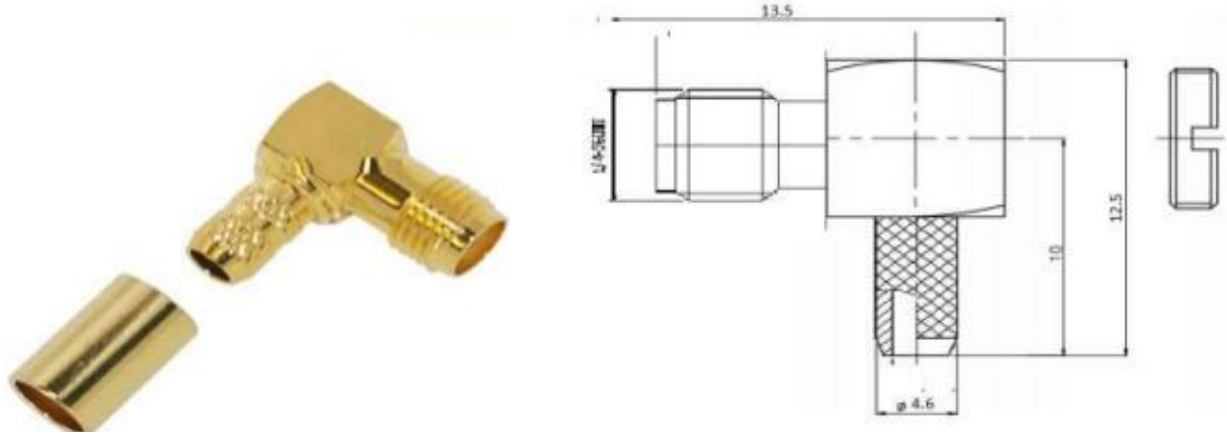

ELECTRICAL & MECHANICAL SPECIFICATIONS	
Frequency Range	DC-3GHz
VSWR (max)	≤1.15@DC-6GHz
Dielectric Withstanding Voltage	≥1000Vrms, 50 Hz at sea level
Working Voltage	335V RMS,50Hz,at sea level
Characteristic Impedence	50 Ω
Contact Resistance	Center Contact ≤3mΩ Outer Contact ≤2.5mΩ
Dielectirc Resistance	≥5000MΩ
Durability	Mating Cycles ≥500
Material & Plating	
	Material                      Plating
Body	Brass                              Au
Insulator	PTFE(Teflon)                      -
Center conductor	Phosphor Copper                      Au
Environmental	
Temperature Range	-40°C~+85°C
Humidity	5~95 %
RoHS	Compliant Yes