


698-4000 MHz N Female 6dB Directional Coupler (Model No. SRFS-DC-06-5G)



Electrical and Mechanical Specifications	
Operating Frequency	698-4000 MHz
Impedance	50 Ohm
VSWR	1.25
Coupling	6 dB
Tolerance	0.9 dB
Insertion Loss	1.40 dB
Isolation	≥ 25 dB
IM3 (dBc @ 2×43 dBm)	-150 dBc
Application	Indoor/Outdoor
Operating Temperature	-40 to 80 °C
Interface	N Female /Din Female /4.3-10 Female
Handling Power	300 W
Peak Power	1200 W
Dimension (mm) (L × W × H, excl connector)	110*36*18 mm
Net Weight	155±20 Gms
ROHS Compliance	Yes

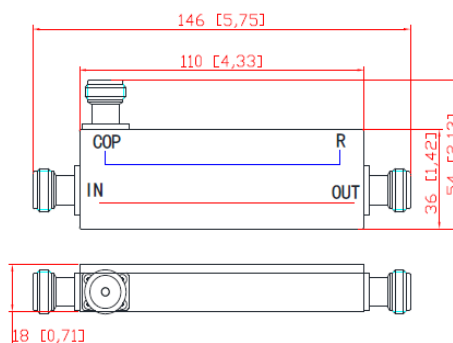

Add: plot no 10 shiv vihar a block Najafgarh Sahibi river road Vikasnagar Uttam nagar new delhi-110059

+91-9027232570, +91-8800726650, +91 8076749052 info@srfsteleinfra.in, info@srfsteleinfra.com, srfsteleinfra@gmail.com

www.srfsteleinfra.in, www.srfsteleinfra.com