


Low PIM 4.3-10 Male to 4.3-10 Male Adapter

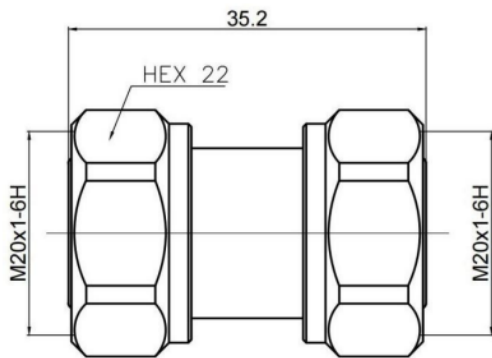

| ELECTRICAL SPECIFICATIONS | |
|---------------------------|------------------------------|
| Impedance | 50 ohm |
| Frequency Range | DC-6 GHz |
| VSWR | 1.25 max |
| PIM (Intermod) | -160dBc min with 2x20W tones |
| Operating Temp | -40°C ~ +125°C |
| RoHS | Compliant |
| MATERIAL & PLATING | |
| Connector Body | Ternary alloy plated brass |
| Center Contact | Silver plated brass |
| Insulator | PTFE WORLD |
| Weight | 86g |