



0.8mm Female to 1.0mm Female Adaptor

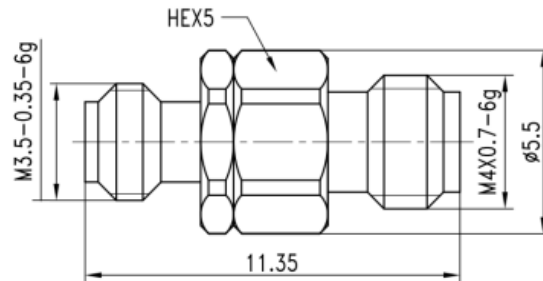

Electrical & Mechanical Specifications

Impedance	50 Ohm
Frequency Range	DC-110 GHz
VSWR	1.35 max
Operating Temp	-55°C to +85°C
Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper
Insulator	PEIs

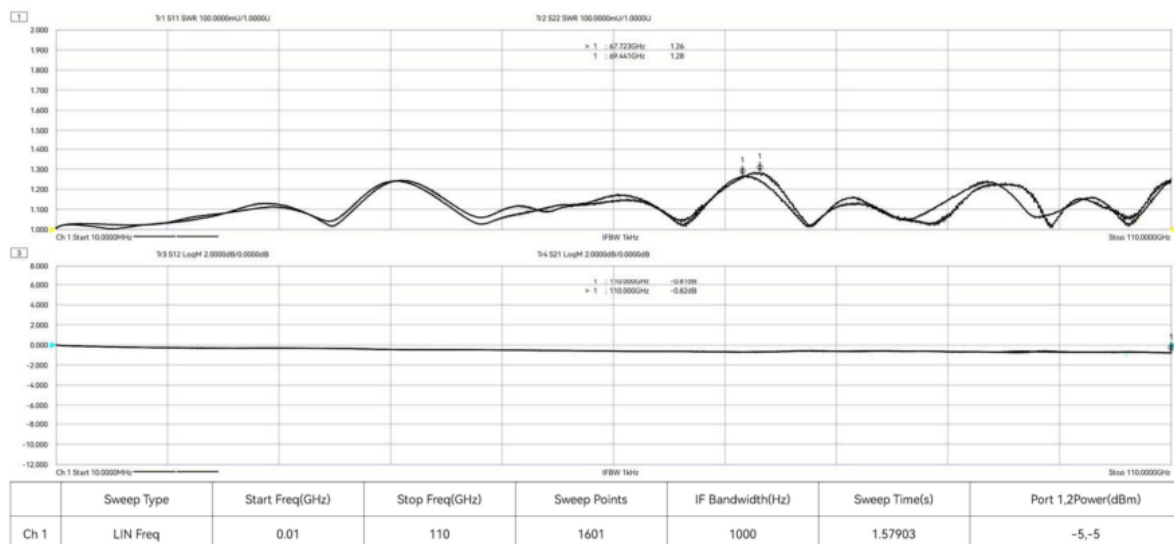

Add: plot no 10 shiv vihar a block Najafgarh Sahibi river road Vikasnagar Uttam nagar new delhi-110059

+91 84354 74330 info@srfsteleinfra.in, sales@srfsteleinfra.in

www.srfsteleinfra.in, www.srfsteleinfra.com

SRFS Teleinfra | All specifications are subject to change.
SRFS reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.
It may be necessary to make modifications to the part and/or the documentation of the part to implement improvements.
See www.srfsteleinfra.in for the most current information. Revised: 19 Jan 2023

