


BNC Female to BNC Female Flange RF Adaptor

Model No.- SRFS-BNC-FF-2

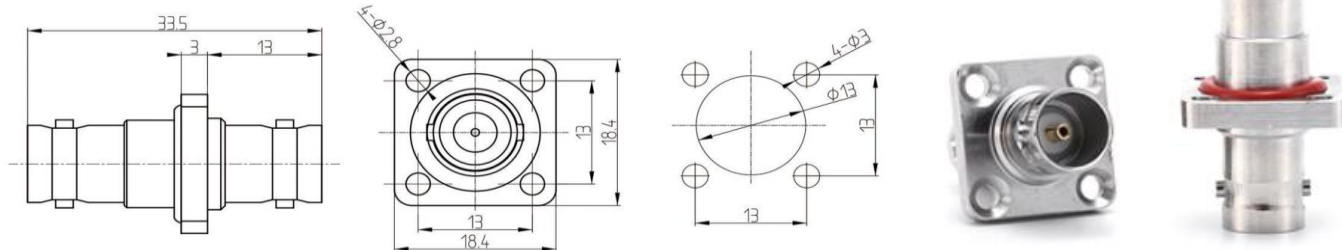

Electrical, Mechanical & Environmental Specification

Characteristic impedance	75Ω
Frequency	DC-2Ghz
Dielectric withstanding voltage	1000V
Insulation Resistance	≥5000MΩ
Center conductor	≤3mΩ
Outer conductor	≤2mΩ
VSWR	≤1.15+0.02F
Dielectric withstanding voltage	1000V
Temperature range	-45°C to+125°C

Material & Plating

Connector parts	Material	Plating
Body	Barss	Nickel
Pin contacts	Bronze	gold
Gasket	Silicon rubber	
Insulators	Teflon	