


SMA Female to Female Bulkhead Adaptor

Model No.- SRFS-SMAFF-6

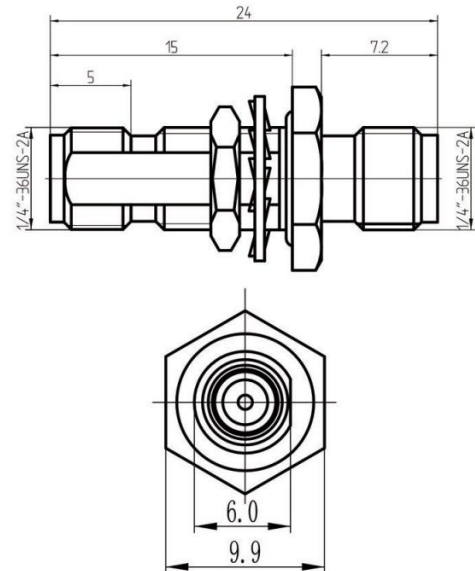

Electrical, Mechanical & Environmental Specification

Impedance	50Ω
Frequency	DC-6GHz
Center Contact Resistance	≤3MΩ
Outer Contact Resistance	≤2MΩ
Insulation Resistance	≥5000mΩ
VSWR	1.20:1
Temperature range	-45°C ~ +125°C
Durability	>500 cycles

Material & Plating

Connector parts	Material	Plating
Body	Brass	Gold
Gasket	Silicon rubber	
Pin Contact	Beryllium copper	Gold
Insulators	PTFE	