


SMA Female to Female Bulkhead RF Coaxial Adaptor

Model No.- SRFS-SMAFF-BH-6

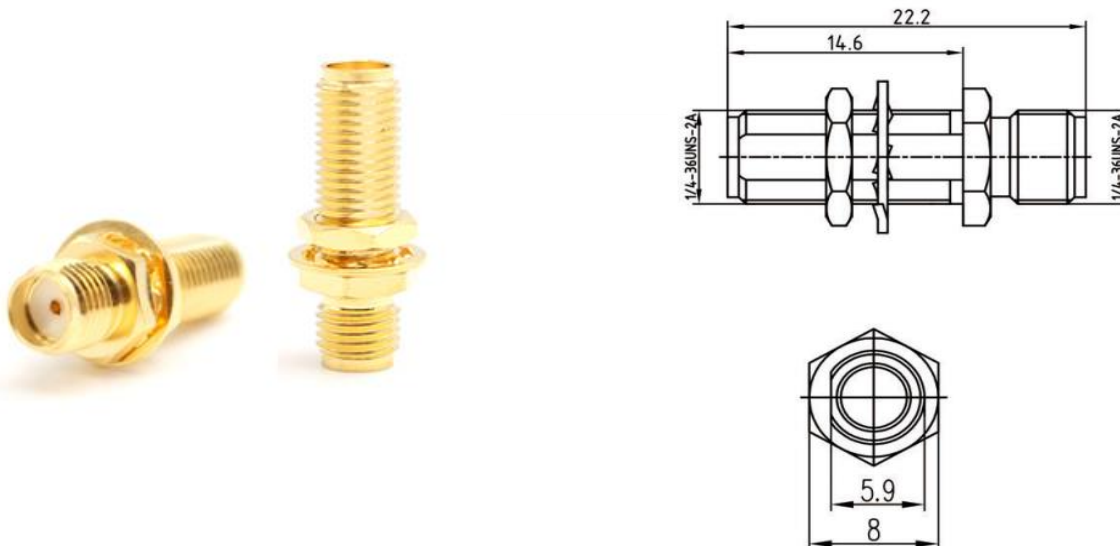

Electrical, Mechanical & Environmental Specification

Impedance	50Ω
Frequency	DC-6GHz
Center Contact Resistance	≤3MΩ
Outer Contact Resistance	≤2MΩ
Insulation Resistance	≥5000mΩ
VSWR	1.20:1
Temperature range	-45°C ~ +85°C
Durability	>500

Material & Plating

Connector parts	Material	Plating
Body	Brass	Gold
Pin Contact	Beryllium-copper	Gold
Insulators	PTFE	