



SMA Female to SMA Female Flange RF Coaxial Adaptor

Model No.- SRFS-SMAFF-F-6

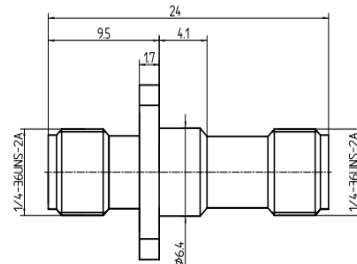

Electrical, Mechanical & Environmental Specification		
Impedance	50Ω	
Frequency	DC-6GHz	
Center Contact Resistance	≤3MΩ	
Outer Contact Resistance	≤2MΩ	
Insulation Resistance	≥5000mΩ	
VSWR	1.1+0.02F	
Temperature range	-55°C ~ +125°C	
Durability(matings)	≥500	
Material & Plating		
Connector parts	Material	Plating
Body	Brass	Nickel plated
Pin Contact	Beryllium copper	Gold
Insulators	Teflon	