


SMA Male to SMA Male RF Coaxial Adaptor

Model No.- SRFS-SMAMM-6

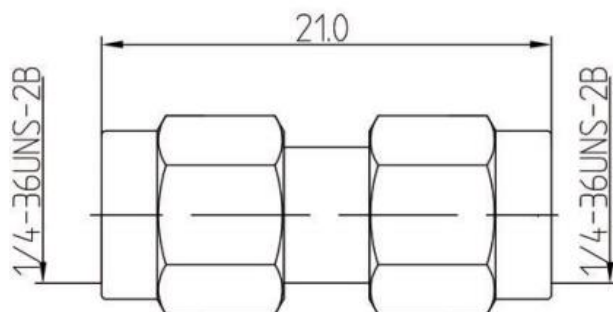

Electrical, Mechanical & Environmental Specification

Impedance	50Ω
Frequency	DC-6GHz
Center Contact Resistance	≤3MΩ
Outer Contact Resistance	≤2MΩ
Insulation Resistance	≥5000mΩ
VSWR	≤1.20
Temperature range	-45°C - 85°C
Durability(matings)	≥500
RoHS Compliant	Yes

Material & Plating

Connector parts	Material	Plating
Body	Brass	Gold
Pin Contact	Brass	Gold
Insulators	PTFE	
Coupling nut	Brass	Gold