


Model No.- SRFS-SMAMM-6

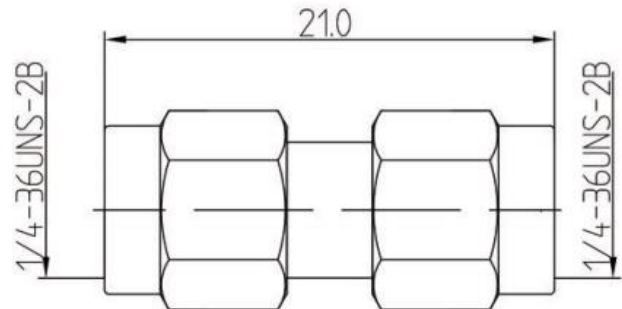

Electrical, Mechanical & Environmental Specification		
Impedance	50Ω	
Frequency	DC-6GHz	
Center Contact Resistance	≤3MΩ	
Outer Contact Resistance	≤2MΩ	
Insulation Resistance	≥5000mΩ	
VSWR	≤1.20	
Temperature range	-45°C - 85°C	
Durability(matings)	≥500	
RoHS Compliant	Yes	
Material & Plating		
Connector parts	Material	Plating
Body	Brass	Gold
Pin Contact	Brass	Gold
Insulators	PTFE	
Coupling nut	Brass	Gold