


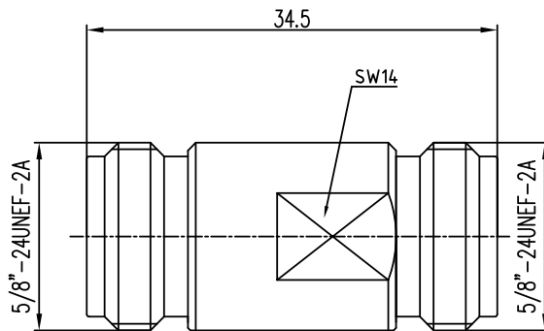

Electrical and Mechanical Specifications		
Characteristic impedance	50Ω	
Frequency range	DC-18GHZ	
VSWR	≤1.20	
Temperature range	-55°C to 165°C	
Durability (matings)	>500 cycles	
RoHs Complaint	yes	
Material & Plating		
Connector parts	Material	Plating
Body	Stainless steel (SU303)	Passivated
Insulator	PEI	
Contact Pin	Beryllium-Copper	Gold plated