


N female to N female bulkhead stainless steel RF Coaxial Adaptor

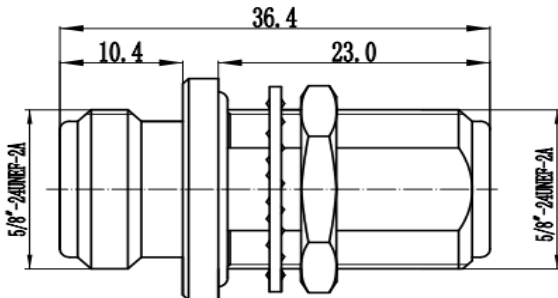

Electrical and Mechanical Specifications

Characteristic impedance	50Ω
Frequency range	DC-18GHZ
VSWR	≤1.20
Temperature range	-45°C to 125°C
Durability (matings)	>500 cycles
RoHs Complaint	yes

Material & Plating

Connector parts	Material	Plating
Body	Stainless steel (SU303)	Passivated
Insulator	PEI	
Contact Pin	Beryllium-Copper	Gold plated