



SRFS TELEINFRA

Get connected with us:



Coaxial Fixed Attenuator DC-6 GHz, 30dB, 10 Watts, N, Bidirectional Model No.- SRFS-AT-NMNF-30-6

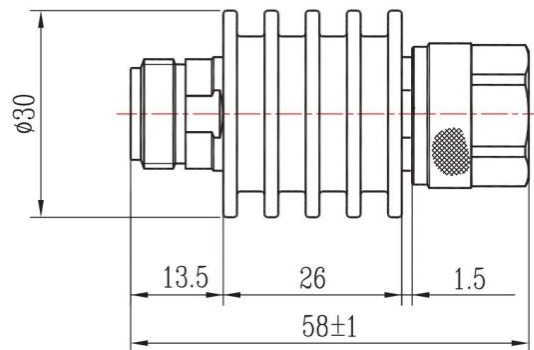

Electrical & Mechanical Specifications	
Impedance	50 ohm
Frequency Range	DC-6 GHz
VSWR	1.2 max
Input Avg Power	10W@ 25°C
Peak Power	500W
Direction	Bidirectional, N female to N male
Attenuation(dB)	30
Accuracy(dB)	±0.8
Connector Body	Ternary alloy plated brass
Heat Sink	N/A
Center Contact	Gold plated beryllium copper/brass
Net Weight	About 90 g
Environmental	
Storage Temperature	-55°C to 125°C
RoHS Compliant	Yes
Operating Temperature	-55°C to 100°C

Add: plot no 10 shiv vihar a block Najafgarh Sahibi river road Vikasnagar Uttam nagar new delhi-110059

+91 84354 74330 info@srfsteleinfra.in, aayush@srfsteleinfra.in, srfsteleinfra@gmail.com

www.srfsteleinfra.in, www.srfsteleinfra.com

SRFS Teleinfra | All specifications are subject to change.
SRFS reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.
It may be necessary to make modifications to the part and/or the documentation of the part to implement improvements.
See www.srfsteleinfra.in for the most current information. Revised: 19 Jan 2023

