


SRFS TELEINFRA

Rotary Stepped Attenuators

DC~18GHz, 0~90dB, 25W

Model No- SRFS-RSAT-10-18

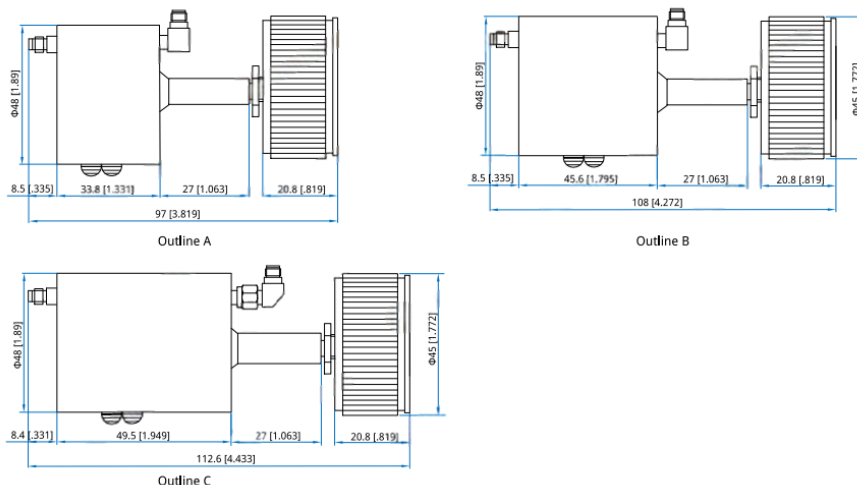

Frequency (GHz)	Attenuation Range/Step (dB)	VSWR (Max.)	IL (dB Max.)	Attenuation Accuracy ($\pm$ dB)	Avg Power (W)	Connectors
DC~8 DC~12.4 DC~18	0~9/1	1.4 1.5 1.6	0.8 1 1.2	0.6 0.8 1	2,10	SMA
DC~18	0~70/10	1.65	1	1.5 or 4%	25	SMA
DC~8 DC~12.4 DC~12.4	0~90/10	1.4 1.5 1.6	1 1.2 1.5	1.5 (0~60dB), 2.5 or 3.5% (70~90dB)	2,10	SMA

Technical Specification	
Impedance	50 Ω
Peak Power	200W
RF Connectors	SMA Female
Housing Materials Aluminum	Aluminum
Temperature	0~+54°C